

Riikku



Riikku full height balcony glazing, Use and care instructions

I. Opening the door glass

The opening device can be used with one hand by rotating the knob. Turn the knob $\sim 45^\circ$ and make sure that both the upper and lower locking pins are released. You can turn the knob either clockwise or counterclockwise. Turn the glass open and support it by hand.



The handle-type opening device features a child-proof lock (1.) that needs to be pushed down before the handle (2.) is turned. Turn the handle **down** approximately $\sim 45^\circ$ and make sure that both the upper and lower locking pins are released and that the door glass can be opened and supported by hand.



NOTE The handle must be turned when closing the door glass.


2. Ventilation position

Open the door glass as in point 1., but leave the door glass in the slot in the upper gate and position the sliding glass in a position that allows air to circulate on the balcony.




3. Opening a sliding glass

Move the sliding glass close to the opened glass. Push the glass to be opened carefully against the already open glass and rotate to the side, supporting its edge by hand.

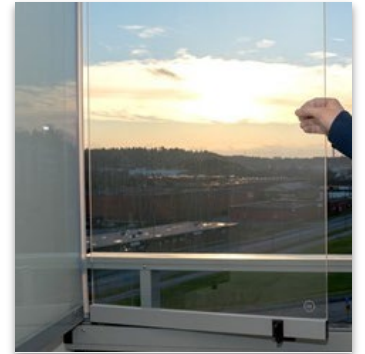

4. Attaching glasses to the wall lock

Open the number of glasses you want against the balcony side wall, stopper, or pillar. Take the wall lock cord around the glasses and **place the wall lock hook onto the outer edge of the glass**. Tighten the glass bundle and lock the cord into the slot in the wall lock or hook.

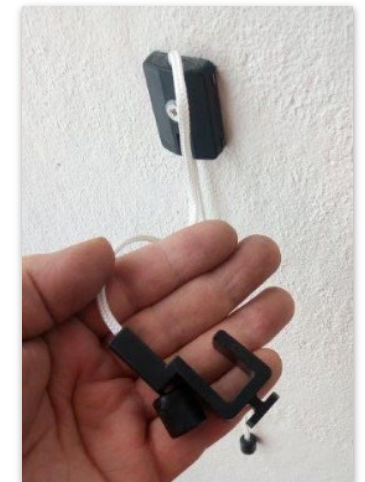

5. Closing sliding glasses

Release the wall lock cord from the slot and remove the hook from the glass. Turn the glasses briskly one at a time while supporting the edge of the glass with your hand. Slide the glasses into place.



6. Closing the door glass

Turn the handle as when opening to release the upper and lower locking pins when closing the door glass. When closing the door glass, make sure that there is room for it to close and that it does not meet a sliding glass.

Care instructions

When the glazing is used regularly, dirt and dust cannot accumulate in between the parts. Washing and servicing the glazing regularly will also prolong its service life and keep the glazing safe and pleasant.

Check the condition of the glazing and the railing regularly: Pay particular attention to the integrity and correct placement of the seals and that there are no cracks or breaks in the glasses. And that the gap between the glasses is regular and even. If you detect any problems with the above or the fasteners, notify the building manager or maintenance provider immediately and do not use the balcony.

Note! If there is ice on the balcony glass and its components, open the glasses carefully to avoid damage.

Glass components

Glass surfaces should be cleaned regularly, at least twice a year, using water and neutral detergents (pH 6-8) to keep dirt from sticking to the glass.

Aluminium components

Aluminium profiles can be cleaned with water and a neutral detergent. Avoid abrasive materials to not scratch the surfaces.

Plastic components

The plastic runner rollers can be lubricated annually using silicon oil. Such as Riikku Silicon Oil Pro -lubricant.

Visible plastic components can be cleaned with water and a neutral detergent.

Enjoy your time on your **Riikku**-balcony!

Riikku Rakenteet Oy
Lasipellontie 8,
63400 Alavus,
Finland

riikku@riikku.fi
www.riikku.fi